

# FORCE LIFT

## EUROFLAG 45/24 HQ



**WORKING HEIGHT**  
45m



**MAX. BASKET CAPACITY**  
500/350/250kg



**TURRETT ROTATION**  
360° continuous



**MAX. LATERAL OUTREACH**  
500 kg - 19,5m



**MAX. LATERAL OUTREACH**  
350 kg - 25,5m




**MAX. LATERAL OUTREACH**  
250 kg - 24m



**BASKET ROTATION**  
+/- 45°

### WORKING PLATFORM DIMENSIONS

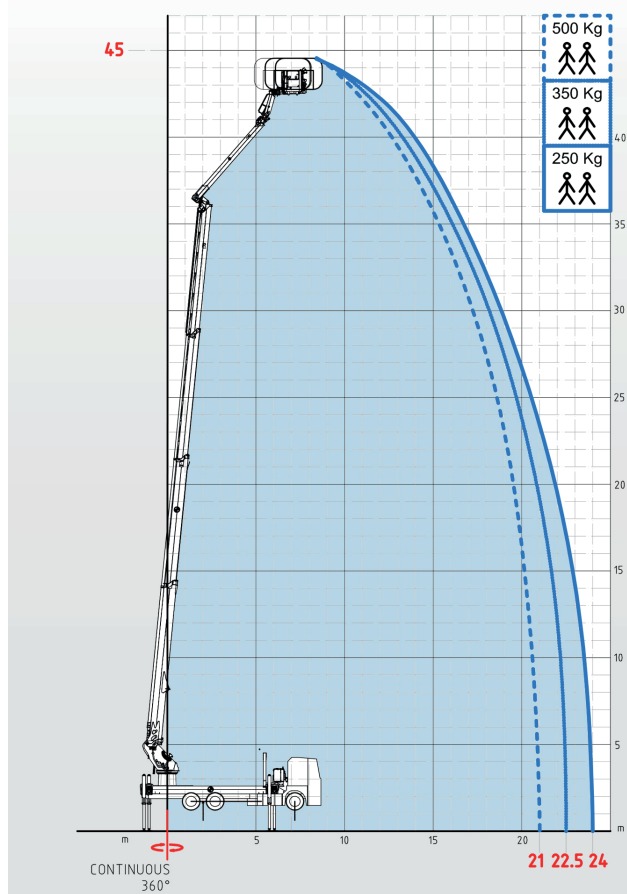

### STANDARD EQUIPMENT

The Euroflag 45 platform must be installed on trucks with technical characteristics suitable for its assembly, the characteristics listed below are indicative for a standard assembly, for each installation Officinecomet spa will check the possibility of coupling between the Euroflag 45 and the proposed truck in order to comply with the technical and safety requirements.

### DIMENSIONS

LENGTH 10,97 m (1)

HEIGHT < 4 m

WIDTH 500 kg 2,55 m

WEIGHT 350 kg 24000 kg (2)

CAPACITY 250 kg 2,20x1,0x1,1 m (LxPxH)

STRETCHER PLATFORM 1,37x0,50 m

MIN STABILIZATION 2,33 m

MAX STABILIZATION 5.87 m (2)

(1) depending on the installation and model of the truck

(2) minimum weight necessary for the indicated performances depending on the installation

### FIRE FIGHTING YSTEM

MAX CAPACITY 4000/6000 l/min (1)




MAX PRESSURE 12 bar (1)

ROTATION MONITOR +/- 45°

TILTING MONITOR +/- 35° (2)

(1) dependent on the installed water line

(2) depending on the monitor model installed



MAN TGS 28.420 6x2